


TIRE CATALOGUE 2014

JINYU TBR

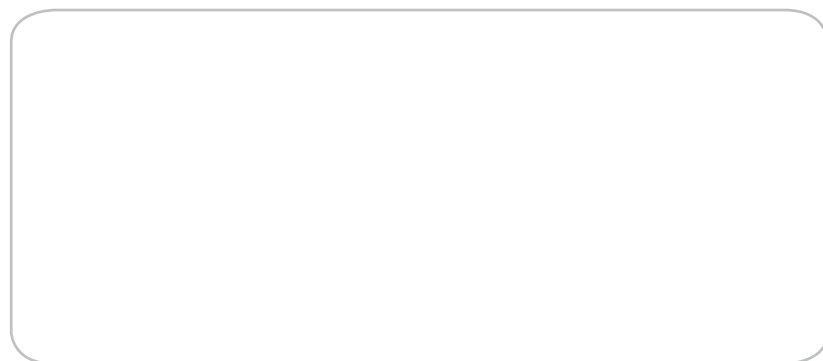

Together And Further

SHANDONG JINYU TIRE CO.,LTD.

Add:No.260,Qingken Road, Dawang, Guangrao,Dongying, Shandong, China

Tel:0086-532-68662176

E-mail:TBR2@jinyutires.com

Fax:0086-532-68662177

Website:www.jinyutires.com

JIMI



Hello ! I'm your old friend JIMI. I'm the image spokesman of JINYU tires and also your faithful partner on your successful road.

JIMI is always travelling together with you.

CONTENTS

| | |
|----------------------------|-----------|
| About us | 1 |
| JINYU Pattern | 3 |
| JF568/JD565 | 5 |
| JY522/JY566 | 7 |
| JT578/JD575 | 9 |
| JY711/JY958 | 11 |
| JT560/JY598 | 13 |
| JA665/JA526 | 15 |
| JY510/JA519 | 17 |
| JD660/JD690 | 19 |
| JT586/JY601 | 21 |
| JD755/JY719 | 23 |
| JD765/JD785 | 25 |
| JY716/JY529 | 27 |
| JY558 | 29 |

Certificates

Our company has been certified by ISO/TS16949, ISO14001, OHSAS18001, etc. The products have been certified by CCC, DOT, ECE, GCC, INMETRO, etc. and the company's laboratory has gotten through the authentication of ISO/IEC 17025.

"JINYU" brand has been awarded as "Famous Trademark of China", "Shandong Famous Brand".

JINYU Tire Group is regarded as National Creditable Enterprise, one of the most powerful 500 national informatization company, China's IM&EX. Good Quality and Faith Enterprise, China petroleum and chemical industry "top 100" export enterprise, the provincial rubber industry "top 50" enterprise, Province-level High-tech Enterprise, Shandong Best Enterprise Citizen, Provincial Banking Best Credit Faithful Customers, Key Customer of CCB Head Office Level, Core Customer of ICBC Head Office Level Industry Chain and Core Customer of International Trade Financing, The World "top50" Tire Trade company and so on.



ABOUT US

Shandong JINYU Tire CO., LTD. is one of the subsidiaries of JINYU Tire Group.

JINYU Tire Group CO., LTD. founded in 1995, is a leader to specialize in developing and manufacturing tires and a cross-regional, cross-industrial comprehensive enterprise group, which consists of Shandong JINYU Tire Co., LTD, Shandong JINYU Industrial Co., LTD, JINYU Group (Hong Kong) Limited and other subsidiary corporation.

With total assets of over 5.5 billion RMB, JINYU Tire Group Co., LTD has advanced tire production, development, test machines and professional techniques, management teams, and established complemented quality warranty systems. With the production capacity of all steel radial tires of 3.1 million pcs/year, semi steel radial tires(PCR) of 10 million pcs/year and OTR tires of 20 thousand pcs/year, the products have been distributed widely throughout the Peoples' Republic of China, as well as over 100 oversea countries and regions.

JINYU Tire Group Co., Ltd insists on following the technology path of both absorption from others and self-development. A small step technology, enterprise will further. JINYU always respect technology research and development as the life of an enterprise, the company invested hundreds of millions RMB to establish technology R&D center with advanced technical equipment, and set up a high efficiency & quality product development team. The R&D center can accomplish raw material testing, new technology, semi-products detection, products inspection, etc. So far, the company has built one complete process development system which is from market research, product planning, formula R&D, structure design to product testing, and has ability of independently researching products of all steel LTR, TBR, OTR, semi steel radial tire (PCR) and

LTR and the relative low rolling resistance, wide base low section and low noise. The company applied for several national patents, and was named "Chinese Patent Shandong Star Enterprise". In respect of production research, it widely make technical communication and cooperation with some other Guangrao rubber companies, Shandong university, Qingdao university of science and technology, Belgium BEKAERT Company etc. and obtain many technical achievements. In 2006, the company technology center was certified as provincial enterprise technology center by the provincial economic and trade commission. In 2008, it was recognized as provincial key enterprise technology center. In August of 2009, Guangrao institute of national tire process and control engineering technology research center was founded. On May 2010, central laboratory passed ISO/IEC 17025 authentication, obtained national-level laboratories approval certificate by China national recognized conformity assessment committee and at the same time it awarded "Shandong Technology Center (Tire Industry Cluster District)" title.

JINYU always insists on the spirit of the "common benefits above all", regards the target as "providing the customers with more valuable products and service whole heartedly", sticks to customer guide, honest & trustworthy, lawful operation, scientific development and strives to realize the common benefits maximization for the stakeholders as the consumers, distributors, suppliers, employees, shareholders, community, government, enterprise etc.

JINYU tires will keep efforts for building a beautiful, harmonious society together with you.



JINYU PATTERN



| | Long distance | Regional | Mixed | Mining | Long distance bus | Inner-city bus |
|--------------|-----------------|-----------------------|-----------------------|-----------------------|-------------------|----------------|
| Vehicle | | | | | | |
| Road | | | | | | |
| Steer | JF568 | JT578 | JY601 | | | |
| Drive | JD565 JY711 | JD575 JY958 | JY719 JD660 JD755 | JD765 JD785 JY716 | | |
| Trailer | JT560 JT586 | JY598 JA519 JY510 | JD690 | | | |
| All-position | JY522 | JY566 JA526 | JA665 | | JY529 | JY558 |



JF568


• Pattern Description

High Abrasion Resistance

Special rubber tread formula offers high abrasion resistance.

Excellent Handling

Unique groove design provides excellent handling and safety.

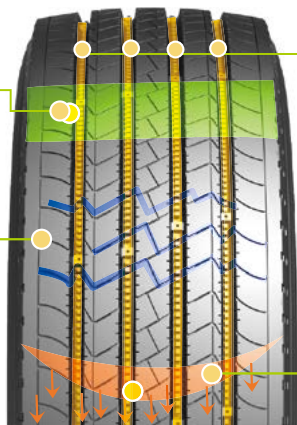

Stability

An optimized 4 straight groove design provides excellent stability and greater mileage.

Fuel Efficient & Environmental Protection

Low rolling resistance reduces fuel consumption making the tire both economical or Green.



JD565

Better Retreadability


Reinforced carcass and upgraded tread rubber formula provide better retreadability.

Powerful Driving Force and Impressive Handling

Optimised block tread patterns along with longitudinal pattern grooves ensures excellent handling, strong driving force, great grip on wet road and provides sufficient power on both curves and ramps.

Longer Mileage

Super wide and wear resistant tread provides longer mileage (and extra 20% compared to the original).

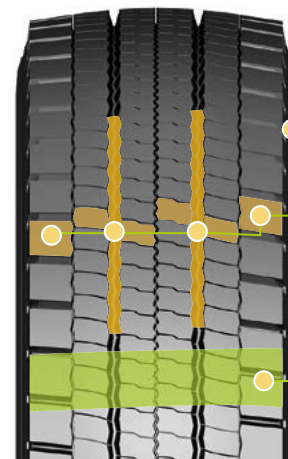

• Suitable Conditions



■ Medium and long mileage running on paved road / Recommended Position: Steering and Trailer Wheels

Recommended ○ Suitable ○



• Test Result



• Suitable Conditions



■ Medium and long mileage running on paved road / Recommended Position: Driving Wheels

Recommended ○ Suitable ○



| Size | Standard Rim | Pr | Load | | | | Pressure | | | | Load Index | | Tread Depth (mm) | Speed Grade | Inflated Tyre Dimension (mm) | |
|-------------|--------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|------------------------------|-----|
| | | | kg | | lbs | | kpa | | psi | | S | D | | | D | B |
| | | | S | D | S | D | S | D | S | D | | | | | | |
| 295/60R22.5 | 9.00 | 16 | 2800 | 2575 | 6175 | 5675 | 830 | 830 | 120 | 120 | 144 | 141 | 14.5 | L | 926 | 292 |
| 295/60R22.5 | 9.00 | 18 | 3350 | 3075 | 7390 | 6780 | 900 | 900 | 130 | 130 | 150 | 147 | 14.5 | L | 926 | 292 |
| 295/80R22.5 | 9.00 | 16 | 3550 | 3150 | 7825 | 6945 | 850 | 850 | 125 | 125 | 152 | 148 | 16 | M | 1044 | 298 |
| 295/80R22.5 | 9.00 | 18 | 3550 | 3250 | 7825 | 7165 | 900 | 900 | 130 | 130 | 152 | 149 | 16 | M | 1044 | 298 |
| 315/60R22.5 | 9.75 | 18 | 3550 | 3150 | 7825 | 6945 | 900 | 900 | 130 | 130 | 152 | 148 | 15 | L | 950 | 320 |
| 315/70R22.5 | 9.00 | 16 | 3550 | 3150 | 7830 | 6940 | 850 | 850 | 123 | 123 | 152 | 148 | 15.5 | M | 1014 | 312 |
| 315/70R22.5 | 9.00 | 18 | 4000 | 3350 | 8820 | 7385 | 900 | 900 | 130 | 130 | 156 | 150 | 15.5 | L | 1014 | 312 |
| 315/80R22.5 | 9.00 | 16 | 3750 | 3350 | 8270 | 7385 | 825 | 825 | 120 | 120 | 154 | 150 | 16.5 | M | 1076 | 312 |
| 315/80R22.5 | 9.00 | 18 | 4000 | 3350 | 8820 | 7385 | 850 | 850 | 123 | 123 | 156 | 150 | 16.5 | L | 1076 | 312 |
| 315/80R22.5 | 9.00 | 20 | 4000 | 3650 | 8820 | 8050 | 850 | 850 | 120 | 120 | 156 | 153 | 16.5 | L | 1076 | 312 |

| Size | Standard Rim | Pr | Load | | | | Pressure | | | | Load Index | | Tread Depth (mm) | Speed Grade | Inflated Tyre Dimension (mm) | |
|-------------|--------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|------------------------------|-----|
| | | | kg | | lbs | | kpa | | psi | | S | D | | | D | B |
| | | | S | D | S | D | S | D | S | D | | | | | | |
| 315/60R22.5 | 9.75 | 18 | 3550 | 3150 | 7825 | 6945 | 900 | 900 | 130 | 130 | 152 | 148 | 18 | L | 958 | 320 |
| 295/60R22.5 | 9.00 | 16 | 2800 | 2575 | 6175 | 5675 | 830 | 830 | 120 | 120 | 144 | 141 | 17 | L | 935 | 292 |
| 295/60R22.5 | 9.00 | 18 | 3350 | 3075 | 7390 | 6780 | 900 | 900 | 130 | 130 | 150 | 147 | 17 | L | 1050 | 298 |
| 295/80R22.5 | 9.00 | 16 | 3550 | 3150 | 7825 | 6945 | 850 | 850 | 125 | 125 | 152 | 148 | 17 | M | 1050 | 298 |
| 295/80R22.5 | 9.00 | 18 | 3550 | 3250 | 7825 | 7165 | 900 | 900 | 130 | 130 | 152 | 149 | 17 | L | 1050 | 298 |
| 315/70R22.5 | 9.00 | 16 | 3550 | 3150 | 7830 | 6940 | 850 | 850 | 123 | 123 | 152 | 148 | 18 | M | 1020 | 312 |
| 315/70R22.5 | 9.00 | 18 | 4000 | 3350 | 8820 | 7385 | 900 | 900 | 130 | 130 | 156 | 150 | 18 | L | 1020 | 312 |
| 315/80R22.5 | 9.00 | 16 | 3750 | 3350 | 8270 | 7385 | 825 | 825 | 120 | 120 | 154 | 150 | 18 | M | 1082 | 312 |
| 315/80R22.5 | 9.00 | 18 | 4000 | 3350 | 8820 | 7385 | 850 | 850 | 123 | 123 | 156 | 150 | 18 | L | 1082 | 312 |
| 315/80R22.5 | 9.00 | 20 | 4000 | 3650 | 8820 | 8050 | 850 | 850 | 120 | 120 | 156 | 153 | 18 | K | 1082 | 312 |



suitable conditions

Medium-and-long mileage vehicles running on paved road

JY522

suitable conditions

Medium-and-long mileage vehicles running on paved road

JY566



Recommended Suitable



- Uniform abrasion resistance
- Low heat build-up
- Low noise
- Long mileage life-time

| Size | Standard Rim | Pr | Load | | | | Pressure | | | | Load Index | | Tread Depth (mm) | Speed Grade | Inflated Tyre Dimension (mm) | |
|-------------|--------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|------------------------------|-----|
| | | | kg | | lbs | | kpa | | psi | | S | D | | | D | B |
| | | | S | D | S | D | S | D | S | D | | | | | | |
| 11R22.5 | 8.25 | 16 | 3000 | 2725 | 6610 | 6010 | 830 | 830 | 120 | 120 | 146 | 143 | 15.5 | L | 1054 | 279 |
| 12R22.5 | 9.00 | 16 | 3350 | 3075 | 7390 | 6780 | 830 | 830 | 120 | 120 | 150 | 147 | 16.0 | L | 1085 | 300 |
| 12R22.5 | 9.00 | 18 | 3550 | 3250 | 7825 | 7165 | 930 | 930 | 135 | 135 | 152 | 149 | 16.0 | K | 1085 | 300 |
| 315/80R22.5 | 9.00 | 18 | 3750 | 3450 | 8270 | 7610 | 830 | 830 | 120 | 120 | 154 | 151 | 16.0 | L | 1076 | 312 |
| 315/80R22.5 | 9.00 | 20 | 4000 | 3650 | 8820 | 8045 | 850 | 850 | 125 | 125 | 156 | 153 | 16.0 | L | 1076 | 312 |



Recommended Suitable



- Excellent durability
- Low heat build-up
- Excellent load
- Long life-time

| Size | Standard Rim | Pr | Load | | | | Pressure | | | | Load Index | | Tread Depth (mm) | Speed Grade | Inflated Tyre Dimension (mm) | |
|-------------|--------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|------------------------------|-----|
| | | | kg | | lbs | | kpa | | psi | | S | D | | | D | B |
| | | | S | D | S | D | S | D | S | D | | | | | | |
| 11R22.5 | 8.25 | 16 | 3000 | 2725 | 6610 | 6010 | 830 | 830 | 120 | 120 | 146 | 143 | 16.0 | L | 1054 | 279 |
| 12R22.5 | 9.00 | 16 | 3350 | 3075 | 7390 | 6780 | 830 | 830 | 120 | 120 | 150 | 147 | 18.0 | L | 1085 | 300 |
| 12R22.5 | 9.00 | 18 | 3550 | 3250 | 7825 | 7165 | 930 | 930 | 135 | 135 | 152 | 149 | 18.0 | K | 1085 | 300 |
| 315/80R22.5 | 9.00 | 18 | 3750 | 3450 | 8270 | 7610 | 830 | 830 | 120 | 120 | 154 | 151 | 17.0 | L | 1076 | 312 |
| 315/80R22.5 | 9.00 | 20 | 4000 | 3650 | 8820 | 8045 | 850 | 850 | 125 | 125 | 156 | 153 | 17.0 | L | 1076 | 312 |
| 13R22.5 | 9.75 | 18 | 3750 | 3450 | 8270 | 7605 | 830 | 830 | 120 | 120 | 154 | 151 | 18.0 | K | 1124 | 320 |
| 10.00R20 | 7.5 | 18 | 3250 | 3000 | 7165 | 6610 | 930 | 930 | 135 | 135 | 149 | 146 | 15.0 | K | 1054 | 278 |
| 11.00R20 | 8.0 | 18 | 3550 | 3250 | 7830 | 7170 | 930 | 930 | 135 | 135 | 152 | 149 | 15.5 | K | 1085 | 293 |
| 12.00R20 | 8.5 | 18 | 3750 | 3450 | 8270 | 7610 | 830 | 830 | 120 | 120 | 154 | 151 | 16.5 | K | 1125 | 315 |



suitable conditions

Medium-and-long mileage trucks running on paved road

JT578



- Low fuel consumption
- Silence
- Outstanding wear resistance
- Good cost performance

Recommended ○ Suitable ○



| Size | Standard Rim | Pr | Load | | | | Pressure | | | | Load Index | | Tread Depth (mm) | Speed Grade | Inflated Tyre Dimension (mm) | |
|---------|--------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|------------------------------|-----|
| | | | kg | | lbs | | kpa | | psi | | S | D | | | D | B |
| | | | S | D | S | D | S | D | S | D | | | | | | |
| 11R22.5 | 8.25 | 14 | 2800 | 2650 | 6175 | 5840 | 720 | 720 | 105 | 105 | 144 | 142 | 15.0 | M | 1054 | 279 |
| 11R22.5 | 8.25 | 16 | 3150 | 2900 | 6945 | 6395 | 840 | 840 | 120 | 120 | 148 | 145 | 15.0 | M | 1054 | 279 |
| 12R22.5 | 9.00 | 16 | 3350 | 3075 | 7390 | 6780 | 830 | 830 | 120 | 120 | 150 | 147 | 15.0 | L | 1085 | 300 |



Suitable Conditions

Medium and long mileage trucks running on paved and highway road

JD575



- Excellent driving performance
- High wear-resistance
- Anti-dropping of blocks

Recommended ○ Suitable ○



| Size | Standard Rim | Pr | Load | | | | Pressure | | | | Load Index | | Tread Depth (mm) | Speed Grade | Inflated Tyre Dimension (mm) | |
|-------------|--------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|------------------------------|-----|
| | | | kg | | lbs | | kpa | | psi | | S | D | | | D | B |
| | | | S | D | S | D | S | D | S | D | | | | | | |
| 215/75R17.5 | 6.00 | 14 | 1700 | 1600 | 3750 | 3525 | 700 | 700 | 100 | 100 | 126 | 124 | 15.0 | M | 773 | 211 |
| 215/75R17.5 | 6.00 | 16 | 2180 | 2060 | 4805 | 4540 | 860 | 860 | 125 | 125 | 135 | 133 | 15.0 | L/J | 773 | 211 |
| 225/70R19.5 | 6.75 | 12 | 1650 | 1550 | 3640 | 3415 | 660 | 660 | 95 | 95 | 125 | 123 | 15.0 | L | 817 | 226 |
| 225/70R19.5 | 6.75 | 14 | 1800 | 1700 | 3970 | 3750 | 760 | 760 | 110 | 110 | 128 | 126 | 15.0 | L | 817 | 226 |
| 235/75R17.5 | 6.75 | 16 | 2000 | 1900 | 4410 | 4190 | 760 | 760 | 110 | 110 | 132 | 130 | 15.0 | M | 803 | 233 |
| 235/75R17.5 | 6.75 | 18 | 2725 | 2575 | 6005 | 5675 | 860 | 860 | 125 | 125 | 143 | 141 | 15.0 | K/L | 803 | 233 |
| 245/70R19.5 | 7.50 | 14 | 2060 | 1950 | 4540 | 4300 | 760 | 760 | 110 | 110 | 133 | 131 | 15.5 | L | 845 | 248 |
| 245/70R19.5 | 7.50 | 16 | 2240 | 2120 | 4940 | 4675 | 830 | 830 | 120 | 120 | 136 | 134 | 15.5 | M | 845 | 248 |
| 265/70R19.5 | 7.50 | 14 | 2300 | 2120 | 5070 | 4675 | 760 | 760 | 110 | 110 | 137 | 134 | 15.5 | L | 873 | 262 |
| 265/70R19.5 | 7.50 | 16 | 2500 | 2360 | 5510 | 5205 | 760 | 760 | 110 | 110 | 140 | 138 | 15.5 | M/L | 873 | 262 |
| 265/70R19.5 | 7.50 | 18 | 2725 | 2575 | 6005 | 5675 | 900 | 900 | 130 | 130 | 143 | 141 | 15.5 | J | 873 | 262 |
| 285/70R19.5 | 8.25 | 16 | 2900 | 2725 | 6395 | 6005 | 850 | 850 | 125 | 125 | 145 | 143 | 16.0 | M | 895 | 283 |
| 285/70R19.5 | 8.25 | 16 | 3350 | 3150 | 7390 | 6945 | 900 | 900 | 130 | 130 | 150 | 148 | 16.0 | K | 895 | 283 |
| 285/70R19.5 | 8.25 | 18 | 3000 | 2800 | 6610 | 6175 | 900 | 900 | 130 | 130 | 146 | 144 | 16.0 | L | 895 | 283 |
| 295/60R22.5 | 9.00 | 16 | 2800 | 2575 | 6175 | 5675 | 830 | 830 | 120 | 120 | 144 | 141 | 19.0 | L | 926 | 292 |
| 295/60R22.5 | 9.00 | 18 | 3350 | 3075 | 7390 | 6780 | 900 | 900 | 130 | 130 | 150 | 147 | 19.0 | L | 926 | 292 |
| 295/80R22.5 | 9.00 | 16 | 3350 | 3075 | 7390 | 6780 | 830 | 830 | 120 | 120 | 150 | 147 | 22.0 | M | 1050 | 298 |
| 295/80R22.5 | 9.00 | 16 | 3350 | 3150 | 7825 | 6945 | 850 | 850 | 125 | 125 | 152 | 148 | 22.0 | M | 1050 | 298 |
| 295/80R22.5 | 9.00 | 18 | 3550 | 3250 | 7825 | 7165 | 900 | 900 | 130 | 130 | 152 | 149 | 22.0 | L | 1050 | 298 |
| 315/60R22.5 | 9.75 | 18 | 3550 | 3150 | 7825 | 6945 | 900 | 900 | 130 | 130 | 152 | 148 | 20.0 | L | 950 | 313 |
| 315/70R22.5 | 9.00 | 18 | 3450 | 3150 | 7610 | 6945 | 830 | 830 | 120 | 120 | 151 | 148 | 20.0 | M | 1020 | 312 |
| 315/70R22.5 | 9.00 | 18 | 4000 | 3350 | 8820 | 7385 | 900 | 900 | 130 | 130 | 156 | 150 | 20.0 | L | 1020 | 312 |
| 315/70R22.5 | 9.00 | 18 | 3750 | 3350 | 8265 | 7385 | 900 | 900 | 130 | 130 | 154 | 150 | 20.0 | L | 1020 | 312 |
| 315/80R22.5 | 9.00 | 18 | 4000 | 3350 | 8820 | 7385 | 850 | 850 | 123 | 123 | 156 | 150 | 22.5 | L | 1082 | 312 |
| 315/80R22.5 | 9.00 | 18 | 3750 | 3450 | 8270 | 7610 | 830 | 830 | 120 | 120 | 154 | 151 | 22.5 | L | 1082 | 312 |
| 315/80R22.5 | 9.00 | 20 | 4000 | 3650 | 8820 | 8050 | 850 | 850 | 120 | 120 | 156 | 153 | 22.5 | K | 1082 | 312 |



suitable conditions

Medium-and-long mileage trucks running on well-paved or generally-paved road

JY711

suitable conditions

Medium-and-long mileage vehicles running on paved road

JY958



Recommended Suitable



- Powerful driving force
- Anti-wear performance
- Low heat build-up
- Long lifetime

| Size | Standard Rim | Pr | Load | | | | Pressure | | | | Load Index | | Tread Depth (mm) | Speed Grade | Inflated Tyre Dimension (mm) | |
|-------------|--------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|------------------------------|-----|
| | | | kg | | lbs | | kpa | | psi | | S | D | | | D | B |
| | | | S | D | S | D | S | D | S | D | | | | | | |
| 11.00R20 | 8.0 | 18 | 3550 | 3250 | 7830 | 7170 | 930 | 930 | 135 | 135 | 152 | 149 | 22.5 | K | 1096 | 293 |
| 12.00R20 | 8.5 | 18 | 3750 | 3450 | 8270 | 7610 | 830 | 830 | 120 | 120 | 154 | 151 | 23.5 | K | 1136 | 315 |
| 11R22.5 | 8.25 | 16 | 3000 | 2725 | 6610 | 6010 | 830 | 830 | 120 | 120 | 146 | 143 | 21.5 | L | 1065 | 279 |
| 12R22.5 | 9.00 | 16 | 3350 | 3075 | 7390 | 6780 | 830 | 830 | 120 | 120 | 150 | 147 | 22.5 | L | 1096 | 300 |
| 12R22.5 | 9.00 | 18 | 3550 | 3250 | 7825 | 7165 | 930 | 930 | 135 | 135 | 152 | 149 | 22.5 | K | 1096 | 300 |
| 315/80R22.5 | 9.00 | 18 | 3750 | 3450 | 8270 | 7610 | 830 | 830 | 120 | 120 | 154 | 151 | 24.5 | L | 1082 | 312 |
| 315/80R22.5 | 9.00 | 20 | 4000 | 3650 | 8820 | 8045 | 850 | 850 | 125 | 125 | 156 | 153 | 24.5 | L | 1082 | 312 |
| 13R22.5 | 9.75 | 16 | 3750 | 3450 | 8270 | 7605 | 830 | 830 | 120 | 120 | 154 | 151 | 23.5 | K | 1136 | 320 |



Recommended Suitable



- Powerful driving force
- Long life-time
- Blocks avoiding tire off

| Size | Standard Rim | Pr | Load | | | | Pressure | | | | Load Index | | Tread Depth (mm) | Speed Grade | Inflated Tyre Dimension (mm) | |
|-------------|--------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|------------------------------|-----|
| | | | kg | | lbs | | kpa | | psi | | S | D | | | D | B |
| | | | S | D | S | D | S | D | S | D | | | | | | |
| 11R22.5 | 8.25 | 16 | 3000 | 2725 | 6610 | 6010 | 830 | 830 | 120 | 120 | 146 | 143 | 19.5 | K | 1065 | 279 |
| 12R22.5 | 9.00 | 16 | 3350 | 3075 | 7390 | 6780 | 830 | 830 | 120 | 120 | 150 | 147 | 20.0 | L | 1096 | 300 |
| 12R22.5 | 9.00 | 18 | 3550 | 3250 | 7825 | 7165 | 930 | 930 | 135 | 135 | 152 | 149 | 20.0 | K | 1096 | 300 |
| 315/80R22.5 | 9.00 | 18 | 3750 | 3450 | 8270 | 7610 | 830 | 830 | 120 | 120 | 154 | 151 | 20.0 | L | 1082 | 312 |
| 315/80R22.5 | 9.00 | 20 | 4000 | 3650 | 8820 | 8045 | 850 | 850 | 125 | 125 | 156 | 153 | 20.0 | L | 1082 | 312 |



JT560



suitable conditions


Medium and short mileage vehicles running on paved road or perfect road

JY598

During the straight driving, wide tread along with 4 straight grooves pattern provides excellent handling, safety and drainage.

Wear resistant rubber and optimised pattern design ensure longer mileage.

Optimised tyre shoulder and unique notch pattern design effectively reduce abnormal tire wear effectively.

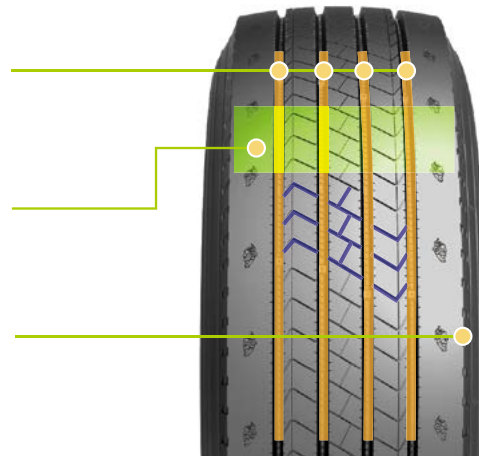

- Excellent durability
- Excellent heat dissipation

Recommended Suitable



| Size | Standard Rim | Pr | Load | | | | Pressure | | | | Load Index | | Tread Depth (mm) | Speed Grade | Inflated Tyre Dimension (mm) | |
|-------------|--------------|----|------|------|-------|-------|----------|-----|-----|-----|------------|-----|------------------|-------------|------------------------------|-----|
| | | | kg | | lbs | | kpa | | psi | | S | D | | | D | B |
| | | | S | D | S | D | S | D | S | D | | | | | | |
| 425/65R22.5 | 12.25 | 18 | 4750 | 4750 | 10470 | 10470 | 760 | 760 | 110 | 110 | 162 | 162 | 16.5 | L | 1124 | 422 |
| 425/65R22.5 | 12.25 | 20 | 5150 | 5150 | 11400 | 11400 | 830 | 830 | 120 | 120 | 165 | 165 | 16.5 | K | 1124 | 422 |
| 385/65R22.5 | 11.75 | 18 | 4250 | 4250 | 9370 | 9370 | 830 | 830 | 120 | 120 | 158 | 158 | 17.5 | L | 1072 | 389 |
| 385/65R22.5 | 11.75 | 20 | 4500 | 4500 | 9920 | 9920 | 900 | 900 | 130 | 130 | 160 | 160 | 17.5 | J | 1072 | 389 |

• Suitable Conditions



■ Medium and long mileage running on paved road / Recommended Position: Trailer Wheels

Recommended Suitable



| Size | Standard Rim | Pr | Load | | | | Pressure | | | | Load Index | | Tread Depth (mm) | Speed Grade | Inflated Tyre Dimension (mm) | |
|-------------|--------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|------------------------------|-----|
| | | | kg | | lbs | | kpa | | psi | | S | D | | | D | B |
| | | | S | D | S | D | S | D | S | D | | | | | | |
| 385/55R22.5 | 12.25 | 18 | 4250 | 4250 | 9370 | 9370 | 850 | 850 | 123 | 123 | 158 | 158 | 14.5 | L | 1002 | 376 |
| 385/55R22.5 | 12.25 | 20 | 4500 | 4500 | 9920 | 9920 | 900 | 900 | 130 | 130 | 160 | 160 | 14.5 | K | 1002 | 376 |
| 385/65R22.5 | 11.75 | 18 | 4250 | 4250 | 9370 | 9370 | 830 | 830 | 120 | 120 | 158 | 158 | 15.5 | L | 1072 | 389 |
| 385/65R22.5 | 11.75 | 20 | 4500 | 4500 | 9920 | 9920 | 900 | 900 | 130 | 130 | 160 | 160 | 15.5 | K | 1072 | 389 |
| 435/50R19.5 | 14.00 | 20 | 4500 | 4500 | 9920 | 9920 | 900 | 900 | 130 | 130 | 160 | 160 | 12.5 | J | 936 | 436 |
| 445/45R19.5 | 15.00 | 20 | 4500 | 4500 | 9920 | 9920 | 900 | 900 | 130 | 130 | 160 | 160 | 13.0 | J | 899 | 446 |



Suitable conditions

Medium-and-short mileage vehicles running on some paved or unpaved road

JA665

Suitable Conditions

medium-and-short mileage vehicles running on some paved or unpaved road

JA526



High Durability



High Strength

- Durability
- Anti-side abrasion
- Anti-peeling performance
- Excellent load

Recommended ○ Suitable ○



| Size | Standard Rim | Pr | Load | | | | Pressure | | | | Load Index | | Tread Depth (mm) | Speed Grade | Inflated Tyre Dimension (mm) | |
|---------|--------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|------------------------------|-----|
| | | | kg | | lbs | | kpa | | psi | | S | D | | | D | B |
| | | | S | D | S | D | S | D | S | D | | | | | | |
| 13R22.5 | 9.75 | 18 | 3750 | 3450 | 8270 | 7610 | 830 | 830 | 120 | 120 | 154 | 151 | 18.0 | K | 1124 | 320 |
| 13R22.5 | 9.75 | 18 | 4000 | 3350 | 8820 | 7385 | 875 | 875 | 125 | 125 | 156 | 150 | 18.0 | K | 1124 | 320 |



High Speed



High Durability

- Anti-peeling
- Cutting-resistance
- Excellent load

Recommended ○ Suitable ○



| Size | Standard Rim | Pr | Load | | | | Pressure | | | | Load Index | | Tread Depth (mm) | Speed Grade | Inflated Tyre Dimension (mm) | |
|----------|--------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|------------------------------|-----|
| | | | kg | | lbs | | kpa | | psi | | S | D | | | D | B |
| | | | S | D | S | D | S | D | S | D | | | | | | |
| 12.00R24 | 8.5 | 18 | 4250 | 3875 | 9370 | 8540 | 830 | 830 | 120 | 120 | 158 | 155 | 15 | K | 1226 | 315 |
| 12.00R24 | 8.5 | 20 | 4500 | 4125 | 9920 | 9090 | 900 | 900 | 130 | 130 | 160 | 157 | 15 | K | 1226 | 315 |



suitable conditions

Medium and short mileage vehicles running on paved road or perfect road

JY510

suitable conditions

Medium-and-short mileage vehicles running on paved road

JA519



- Long lifetime, great stability at high speed
- Great durability
- Low noise performance



| Size | Standard Rim | Pr | Load | | | | Pressure | | | | Load Index | | Tread Depth (mm) | Speed Grade | Inflated Tyre Dimension (mm) | |
|---------|--------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|------------------------------|-----|
| | | | kg | | lbs | | kpa | | psi | | S | D | | | D | B |
| | | | S | D | S | D | S | D | S | D | | | | | | |
| 8.25R16 | 6.50H | 14 | 1700 | 1500 | 3750 | 3310 | 670 | 670 | 97 | 97 | 126 | 122 | 11.5 | L | 855 | 235 |
| 8.25R16 | 6.50H | 16 | 1800 | 1600 | 3970 | 3530 | 770 | 770 | 110 | 110 | 128 | 124 | 11.5 | L | 855 | 235 |



- Outstanding wear resistance
- Silence
- Low fuel consumption
- Good cost performance



| Size | Standard Rim | Pr | Load | | | | Pressure | | | | Load Index | | Tread Depth (mm) | Speed Grade | Inflated Tyre Dimension (mm) | |
|---------|--------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|------------------------------|-----|
| | | | kg | | lbs | | kpa | | psi | | S | D | | | D | B |
| | | | S | D | S | D | S | D | S | D | | | | | | |
| 7.00R16 | 5.50F | 14 | 1320 | 1180 | 2910 | 2600 | 770 | 770 | 110 | 110 | 118 | 114 | 10.0 | L | 775 | 205 |
| 7.50R16 | 6.00G | 14 | 1500 | 1320 | 3310 | 2910 | 770 | 770 | 110 | 110 | 122 | 118 | 11.5 | L | 805 | 215 |

suitable conditions

Medium-and-short mileage vehicles running on some paved or unpaved road

JD660

- Durability
- Anti-side abrasion
- Anti-peeling performance
- Excellent load



Recommended ● Suitable ●



| Size | Standard Rim | Pr | Load | | | | Pressure | | | | Load Index | | Tread Depth (mm) | Speed Grade | Inflated Tyre Dimension (mm) | |
|----------|--------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|------------------------------|-----|
| | | | kg | | lbs | | kpa | | psi | | S | D | | | D | B |
| | | | S | D | S | D | S | D | S | D | | | | | | |
| 11.00R20 | 8.0 | 18 | 3550 | 3250 | 7830 | 7170 | 930 | 930 | 135 | 135 | 152 | 149 | 18.0 | K | 1096 | 293 |
| 12.00R20 | 8.5 | 18 | 3750 | 3450 | 8270 | 7610 | 830 | 830 | 120 | 120 | 154 | 151 | 18.0 | K | 1136 | 315 |
| 13R22.5 | 9.75 | 18 | 3750 | 3450 | 8270 | 7610 | 830 | 830 | 120 | 120 | 154 | 151 | 20.0 | K | 1136 | 320 |
| 13R22.5 | 9.75 | 18 | 4000 | 3350 | 8820 | 7385 | 875 | 875 | 125 | 125 | 156 | 150 | 20.0 | L | 1136 | 320 |

suitable conditions

Medium-and-long mileage trucks running on well-paved or generally-paved road

JD690

- Super wear resistance
- Low heat build-up
- Strong loading capacity



Recommended ● Suitable ●



| Size | Standard Rim | Pr | Load | | | | Pressure | | | | Load Index | | Tread Depth (mm) | Speed Grade | Inflated Tyre Dimension (mm) | |
|----------|--------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|------------------------------|-----|
| | | | kg | | lbs | | kpa | | psi | | S | D | | | D | B |
| | | | S | D | S | D | S | D | S | D | | | | | | |
| 11.00R20 | 8.0 | 18 | 3550 | 3250 | 7830 | 7170 | 930 | 930 | 135 | 135 | 152 | 149 | | K | 1085 | 293 |
| 12.00R20 | 8.5 | 18 | 3750 | 3450 | 8270 | 7610 | 830 | 830 | 120 | 120 | 154 | 151 | | K | 1125 | 315 |



Suitable Conditions


Medium and long mileage trucks running on paved and highway road

suitable conditions

Medium-and-short mileage vehicles running on paved road

JT586

JY601



- High wear-resistance
- Long lifetime
- Low oil consumption
- Good cost performance



- Standard load
- Low heat build-up
- Excellent durability

Recommended ● Suitable ●

Recommended ● Suitable ●



| Size | Standard Rim | Pr | Load | | | | Pressure | | | | Load Index | | Tread Depth (mm) | Speed Grade | Inflated Tyre Dimension (mm) | |
|----------|--------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|------------------------------|-----|
| | | | kg | | lbs | | kpa | | psi | | S | D | | | D | B |
| | | | S | D | S | D | S | D | S | D | | | | | | |
| 10.00R20 | 7.5 | 18 | 3250 | 3000 | 7165 | 6610 | 930 | 930 | 135 | 135 | 149 | 146 | 15.5 | K | 1065 | 278 |
| 11.00R20 | 8.0 | 18 | 3550 | 3250 | 7830 | 7170 | 930 | 930 | 135 | 135 | 152 | 149 | 16.0 | K | 1085 | 293 |
| 12.00R20 | 8.5 | 18 | 3750 | 3450 | 8270 | 7610 | 830 | 830 | 120 | 120 | 154 | 151 | 16.5 | K | 1136 | 315 |

| Size | Standard Rim | Pr | Load | | | | Pressure | | | | Load Index | | Tread Depth (mm) | Speed Grade | Inflated Tyre Dimension (mm) | |
|-------------|--------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|------------------------------|-----|
| | | | kg | | lbs | | kpa | | psi | | S | D | | | D | B |
| | | | S | D | S | D | S | D | S | D | | | | | | |
| 11R22.5 | 8.25 | 14 | 2800 | 2650 | 6175 | 5840 | 720 | 720 | 105 | 105 | 144 | 142 | 16.0 | M | 1054 | 279 |
| 11R22.5 | 8.25 | 16 | 3150 | 2900 | 6945 | 6395 | 840 | 840 | 120 | 120 | 148 | 145 | 16.0 | M | 1054 | 279 |
| 11R24.5 | 8.25 | 14 | 3000 | 2725 | 6610 | 6005 | 720 | 720 | 105 | 105 | 146 | 143 | 16.0 | M | 1104 | 279 |
| 11R24.5 | 8.25 | 16 | 3250 | 3000 | 7160 | 6610 | 830 | 830 | 120 | 120 | 149 | 146 | 16.0 | M | 1104 | 279 |
| 12R22.5 | 9.00 | 16 | 3350 | 3075 | 7390 | 6780 | 830 | 830 | 120 | 120 | 150 | 147 | 16.5 | L | 1085 | 300 |
| 315/80R22.5 | 9.00 | 18 | 3750 | 3450 | 8270 | 7610 | 830 | 830 | 120 | 120 | 154 | 151 | 16.0 | L | 1076 | 312 |
| 315/80R22.5 | 9.00 | 20 | 4000 | 3650 | 8820 | 8045 | 850 | 850 | 125 | 125 | 156 | 153 | 16.0 | K | 1076 | 312 |
| 13R22.5 | 9.75 | 18 | 3750 | 3350 | 8270 | 7390 | 850 | 850 | 125 | 125 | 154 | 150 | 16.0 | L | 1124 | 320 |
| 7.00R16 | 5.50F | 14 | 1320 | 1180 | 2910 | 2600 | 770 | 770 | 110 | 110 | 118 | 114 | 11.5 | K | 775 | 205 |
| 7.50R16 | 6.00G | 14 | 1500 | 1320 | 3310 | 2910 | 770 | 770 | 110 | 110 | 122 | 118 | 12.5 | K | 805 | 215 |
| 8.25R16 | 6.50H | 14 | 1700 | 1500 | 3750 | 3310 | 670 | 670 | 97 | 97 | 126 | 122 | 12.5 | K | 855 | 235 |
| 8.25R16 | 6.50H | 16 | 1800 | 1600 | 3970 | 3530 | 770 | 770 | 110 | 110 | 128 | 124 | 12.5 | L | 855 | 235 |
| 8.25R20 | 6.5 | 16 | 2430 | 2300 | 5360 | 5070 | 930 | 930 | 135 | 135 | 139 | 137 | 13.5 | J | 974 | 236 |
| 9.00R20 | 7.0 | 16 | 2800 | 2650 | 6170 | 5840 | 900 | 900 | 130 | 130 | 144 | 142 | 15.0 | K | 1019 | 259 |
| 10.00R20 | 7.5 | 18 | 3250 | 3000 | 7165 | 6610 | 930 | 930 | 135 | 135 | 149 | 146 | 16.0 | K | 1054 | 278 |
| 11.00R20 | 8.0 | 18 | 3550 | 3250 | 7830 | 7170 | 930 | 930 | 135 | 135 | 152 | 149 | 16.5 | K | 1085 | 293 |
| 12.00R20 | 8.5 | 18 | 3750 | 3450 | 8270 | 7610 | 830 | 830 | 120 | 120 | 154 | 151 | 17.0 | K | 1125 | 315 |



Suitable Conditions
 medium-and-short mileage vehicles
 running on some paved or unpaved road

suitable conditions
 Medium-and-short mileage vehicles running on
 some paved or unpaved road

JD755

JY719



- Excellent drive
- Durability
- Anti-peeling performance
- Excellent load

Recommended ● Suitable ●



| Size | Standard Rim | Pr | Load | | | | Pressure | | | | Load Index | | Tread Depth (mm) | Speed Grade | Inflated Tyre Dimension (mm) | |
|-------------|--------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|------------------------------|-----|
| | | | kg | | lbs | | kpa | | psi | | S | D | | | D | B |
| | | | S | D | S | D | S | D | S | D | | | | | | |
| 11R22.5 | 8.25 | 16 | 3150 | 2900 | 6945 | 6395 | 840 | 840 | 120 | 120 | 148 | 145 | 19.0 | J | 1065 | 279 |
| 12R22.5 | 9.00 | 16 | 3350 | 3075 | 7390 | 6780 | 830 | 830 | 120 | 120 | 150 | 147 | 20.5 | L | 1096 | 300 |
| 12R22.5 | 9.00 | 18 | 3550 | 3250 | 7825 | 7165 | 930 | 930 | 135 | 135 | 152 | 149 | 20.5 | K | 1096 | 300 |
| 13R22.5 | 9.75 | 18 | 3750 | 3450 | 8270 | 7605 | 830 | 830 | 120 | 120 | 154 | 151 | 22.5 | K | 1136 | 320 |
| 315/80R22.5 | 9.00 | 18 | 3750 | 3450 | 8270 | 7610 | 830 | 830 | 120 | 120 | 154 | 151 | 22.0 | K | 1082 | 312 |
| 315/80R22.5 | 9.00 | 20 | 4000 | 3650 | 8820 | 8045 | 850 | 850 | 125 | 125 | 156 | 153 | 22.0 | J | 1082 | 312 |



- Excellent drive
- Anti-peeling
- Cutting-resistance
- Excellent load

Recommended ● Suitable ●



| Size | Standard Rim | Pr | Load | | | | Pressure | | | | Load Index | | Tread Depth (mm) | Speed Grade | Inflated Tyre Dimension (mm) | |
|----------|--------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|------------------------------|-----|
| | | | kg | | lbs | | kpa | | psi | | S | D | | | D | B |
| | | | S | D | S | D | S | D | S | D | | | | | | |
| 12.00R24 | 8.5 | 18 | 4250 | 3875 | 9370 | 8540 | 830 | 830 | 120 | 120 | 158 | 155 | 20.0 | K | 1238 | 315 |
| 12.00R24 | 8.5 | 20 | 4500 | 4125 | 9920 | 9090 | 900 | 900 | 130 | 130 | 160 | 157 | 20.0 | K | 1238 | 315 |
| 7.00R16 | 5.50F | 14 | 1320 | 1180 | 2910 | 2600 | 770 | 770 | 110 | 110 | 118 | 114 | 14.0 | K | 775 | 205 |
| 7.50R16 | 6.00G | 14 | 1500 | 1320 | 3310 | 2910 | 770 | 770 | 110 | 110 | 122 | 118 | 15.5 | K | 811 | 215 |
| 8.25R16 | 6.50H | 14 | 1700 | 1500 | 3750 | 3310 | 670 | 670 | 97 | 97 | 126 | 122 | 15.5 | K | 865 | 235 |
| 8.25R16 | 6.50H | 16 | 1800 | 1600 | 3970 | 3530 | 770 | 770 | 110 | 110 | 128 | 124 | 15.5 | L | 865 | 235 |
| 8.25R20 | 6.5 | 16 | 2430 | 2300 | 5360 | 5070 | 930 | 930 | 135 | 135 | 139 | 137 | 17.0 | K | 974 | 236 |
| 9.00R20 | 7.0 | 16 | 2800 | 2650 | 6170 | 5840 | 900 | 900 | 130 | 130 | 144 | 142 | 17.5 | K | 1030 | 259 |
| 10.00R20 | 7.5 | 18 | 3250 | 3000 | 7165 | 6610 | 930 | 930 | 135 | 135 | 149 | 146 | 18.5 | K | 1065 | 278 |



suitable conditions

Short mileage vehicles running on unpaved road

JD765



High Durability High Strength

- Excellent load
- Impact-resistance
- Durability
- Pick-resistance on bad road

Recommended Suitable



| Size | Standard Rim | Pr | Load | | | | Pressure | | | | Load Index | | Tread Depth (mm) | Speed Grade | Inflated Tyre Dimension (mm) | |
|----------|--------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|------------------------------|-----|
| | | | kg | | lbs | | kpa | | psi | | S | D | | | D | B |
| | | | S | D | S | D | S | D | S | D | | | | | | |
| 7.50R16 | 6.00G | 14 | 1500 | 1320 | 3310 | 2910 | 770 | 770 | 110 | 110 | 122 | 118 | 16.5 | D | 816 | 216 |
| 8.25R16 | 6.50H | 16 | 1800 | 1600 | 3970 | 3530 | 770 | 770 | 110 | 110 | 128 | 124 | 16.5 | D | 861 | 232 |
| 11.00R20 | 8.0 | 18 | 3550 | 3250 | 7830 | 7170 | 930 | 930 | 135 | 135 | 152 | 149 | 24.0 | D | 1096 | 293 |
| 12.00R20 | 8.5 | 18 | 3750 | 3450 | 8270 | 7610 | 830 | 830 | 120 | 120 | 154 | 151 | 24.0 | D | 1136 | 315 |



suitable conditions

Short mileage vehicles running on unpaved road

JD785



High Durability High Strength

- Excellent load
- Impact-resistance
- Durability
- Pick-resistance on bad road

Recommended Suitable



| Size | Standard Rim | Pr | Load | | | | Pressure | | | | Load Index | | Tread Depth (mm) | Speed Grade | Inflated Tyre Dimension (mm) | |
|----------|--------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|------------------------------|-----|
| | | | kg | | lbs | | kpa | | psi | | S | D | | | D | B |
| | | | S | D | S | D | S | D | S | D | | | | | | |
| 11.00R20 | 8.0 | 18 | 3550 | 3250 | 7830 | 7170 | 930 | 930 | 135 | 135 | 152 | 149 | 24.0 | D | 1096 | 293 |
| 12.00R20 | 8.5 | 18 | 3750 | 3450 | 8270 | 7610 | 830 | 830 | 120 | 120 | 154 | 151 | 24.0 | D | 1136 | 315 |



suitable conditions
Short mileage vehicles running on unpaved road

JY716



- Excellent drive
- Anti-peeling performance
- Excellent load

Recommended Suitable



| Size | Standard Rim | Pr | Load | | | | Pressure | | | | Load Index | | Speed Grade | Inflated Tyre Dimension (mm) | | SLR | |
|----------|--------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|-------------|------------------------------|------|-----|------------|
| | | | kg | | lbs | | kpa | | psi | | S | D | | D | B | mm | inch (32") |
| | | | S | D | S | D | S | D | S | D | S | D | | | | | |
| 9.00R20 | 7.0 | 16 | 2800 | 2650 | 6170 | 5840 | 900 | 900 | 130 | 130 | 144 | 142 | 19.5 | K | 1030 | 259 | |
| 12.00R24 | 8.5 | 18 | 4250 | 3875 | 9370 | 8540 | 830 | 830 | 120 | 120 | 158 | 155 | 22.0 | K | 1238 | 315 | |
| 12.00R24 | 8.5 | 20 | 4500 | 4125 | 9920 | 9090 | 900 | 900 | 130 | 130 | 160 | 157 | 22.0 | K | 1238 | 315 | |
| 13R22.5 | 9.75 | 18 | 3750 | 3350 | 8270 | 7390 | 850 | 850 | 125 | 125 | 154 | 150 | 21.5 | K | 1136 | 320 | |



suitable conditions
long mileage bus running on very good road

JY529



- Great durability
- Low noise performance
- Anti-eccentric-wear performance
- Long lifetime

Recommended Suitable



| Size | Standard Rim | Pr | Load | | | | Pressure | | | | Load Index | | Tread Depth (mm) | Speed Grade | Inflated Tyre Dimension (mm) | |
|-------------|--------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|------------------------------|-----|
| | | | kg | | lbs | | kpa | | psi | | S | D | | | D | B |
| | | | S | D | S | D | S | D | S | D | S | D | | | | |
| 295/80R22.5 | 9.00 | 18 | 3550 | 3150 | 7825 | 6945 | 850 | 850 | 125 | 125 | 152 | 148 | 15.0 | M | 1044 | 298 |



suitable conditions
City buses running on paved road

JY558



- Excellent durability
- Anti-damage
- Excellent drive

Recommended Suitable



| Size | Standard Rim | Pr | Load | | | | Pressure | | | | Load Index | | Tread Depth (mm) | Speed Grade | Inflated Tyre Dimension (mm) | |
|---------|--------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|------------------------------|-----|
| | | | kg | | lbs | | kpa | | psi | | S | D | | | D | B |
| | | | S | D | S | D | S | D | S | D | | | | | | |
| 10R22.5 | 7.5 | 16 | 2800 | 2650 | 6175 | 5840 | 900 | 900 | 130 | 130 | 144 | 142 | 16.5 | L | 1019 | 254 |

